


ELSA MULTIPLEXER EM-14L



ELSA Multiplexer EM-14L is designed using two processors and works redundantly. This system can transmit/receive data from two RS-232 input serial ports to one RS-232 output serial port. The input priority can be set-up to avoid data collision. Casing is designed using 19" standard and 3U height to be placed in 19" standard rack.

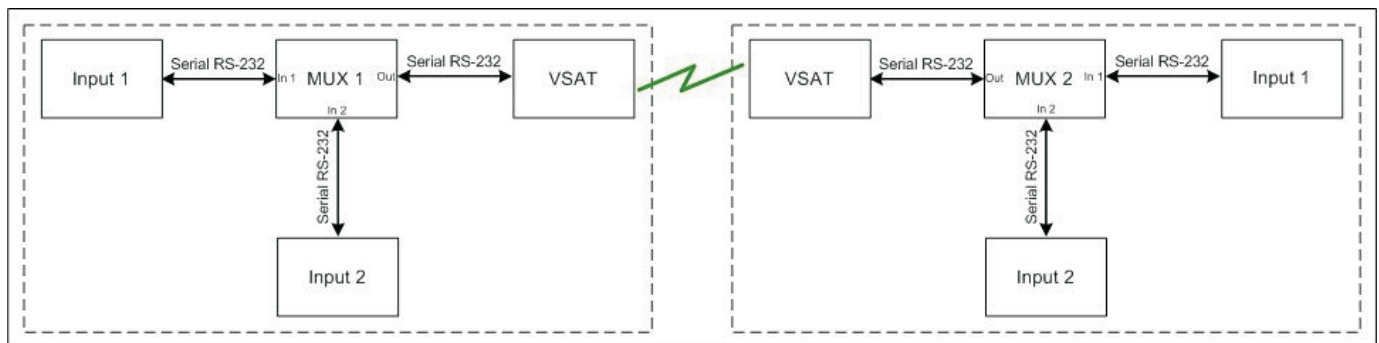

specifications

- * Interface
 - RS-232 standard
 - Connector DB 9 (male)
 - Number of port: 3 (2 input and 1 output)
- * Serial Communication Parameter
 - Baud rate 50 bps up to 115,2 kbps
 - Parity none
 - Flow control RTS/CTS and DTR/DSR
- * Serial Signal
 - TX, RX, RTS, CTS, DTR, DSR and CD
- * Physical Characteristic
 - Standard 19" width
 - Standard 3U height
- * Dual Redundant System
- * Working Mode
 - asynchronous full duplex
 - Channel priority control input: port 1 and port 2
- * Power Requirement
 - AC 100-240 V, 3 A

For more information on
ELSA products and services,
visit www.elsa.co.id

PT.Elekrindodaya Pakarnusa
Soekarno Hatta Km.13.8
Bandung-Indonesia
Tel:62-22-7801536
Fax:62-22-7801690